


1/7

Fig. 1

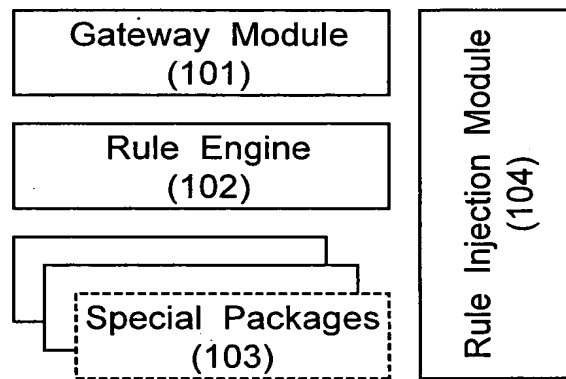

2/7

Fig. 2


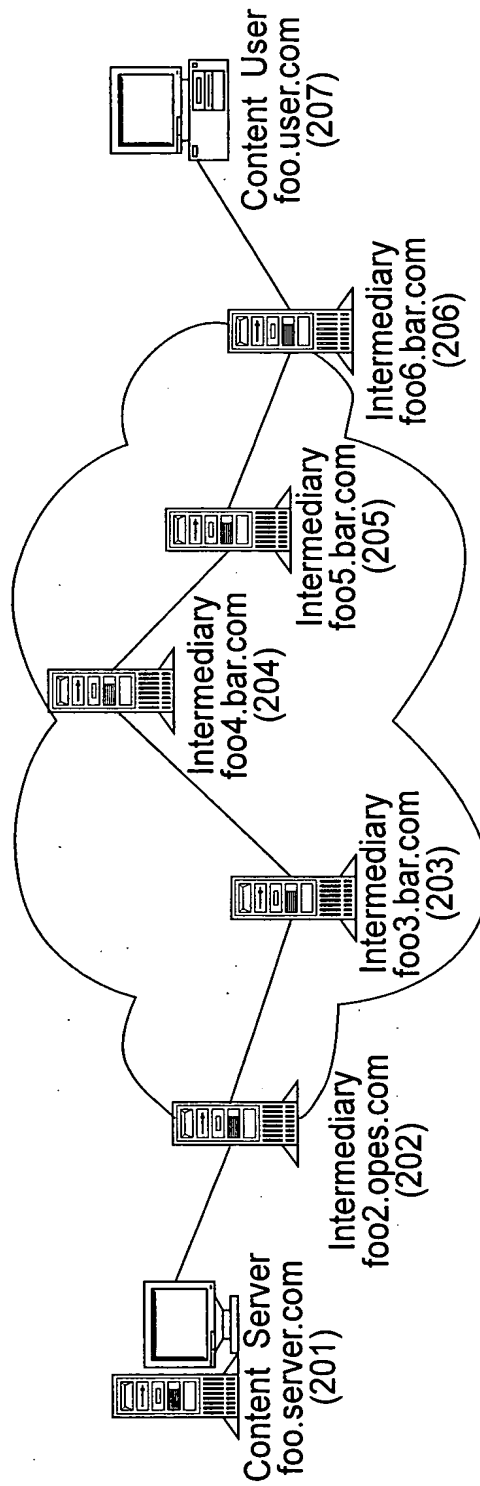


Fig.3

```
ContentPath = {  
    source = "foo.user.com"  
    destination = "foo.server.com"  
    protocol = ...  
    num_nodes = 2  
    nodes[0] = {  
        hostname = "foo3.bar.com"  
        capabilities = ...  
    }  
    nodes[1] = {  
        hostname = "foo2.bar.com"  
        capabilities = ...  
    }  
}  
  
ContentPath = {  
    source = "foo.server.com"  
    destination = "foo.user.com"  
    protocol = ...  
    num_nodes = 2  
    nodes[0] = {  
        hostname = "foo5.bar.com"  
        capabilities = ...  
    }  
    nodes[1] = {  
        hostname = "foo6.bar.com"  
        capabilities = ...  
    }  
}
```

4/7

Fig. 4

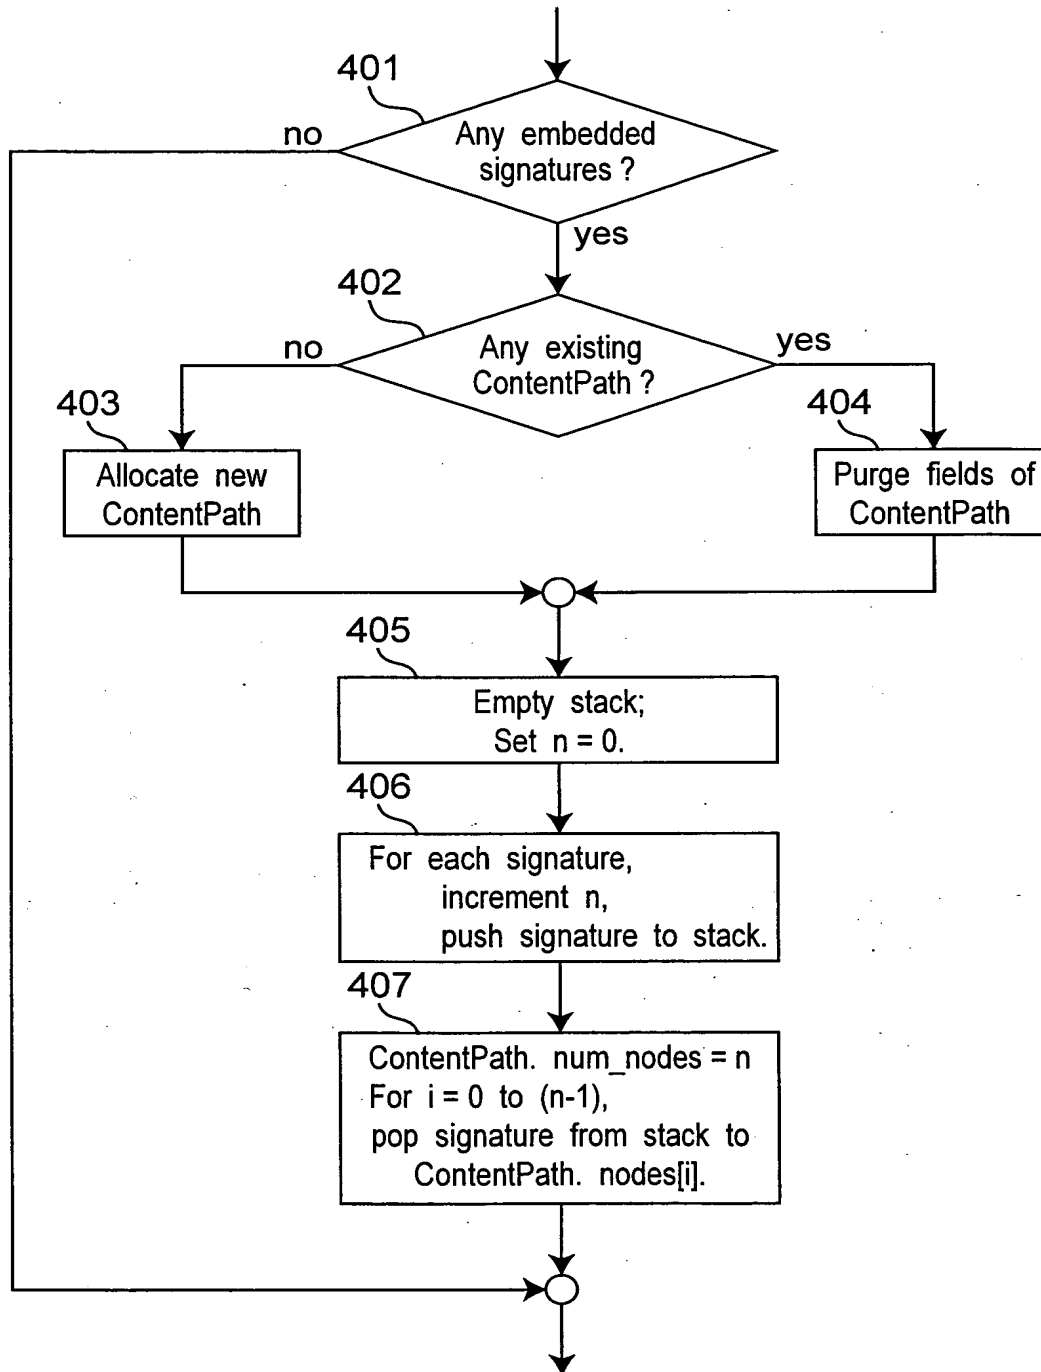

5/7

Fig.5


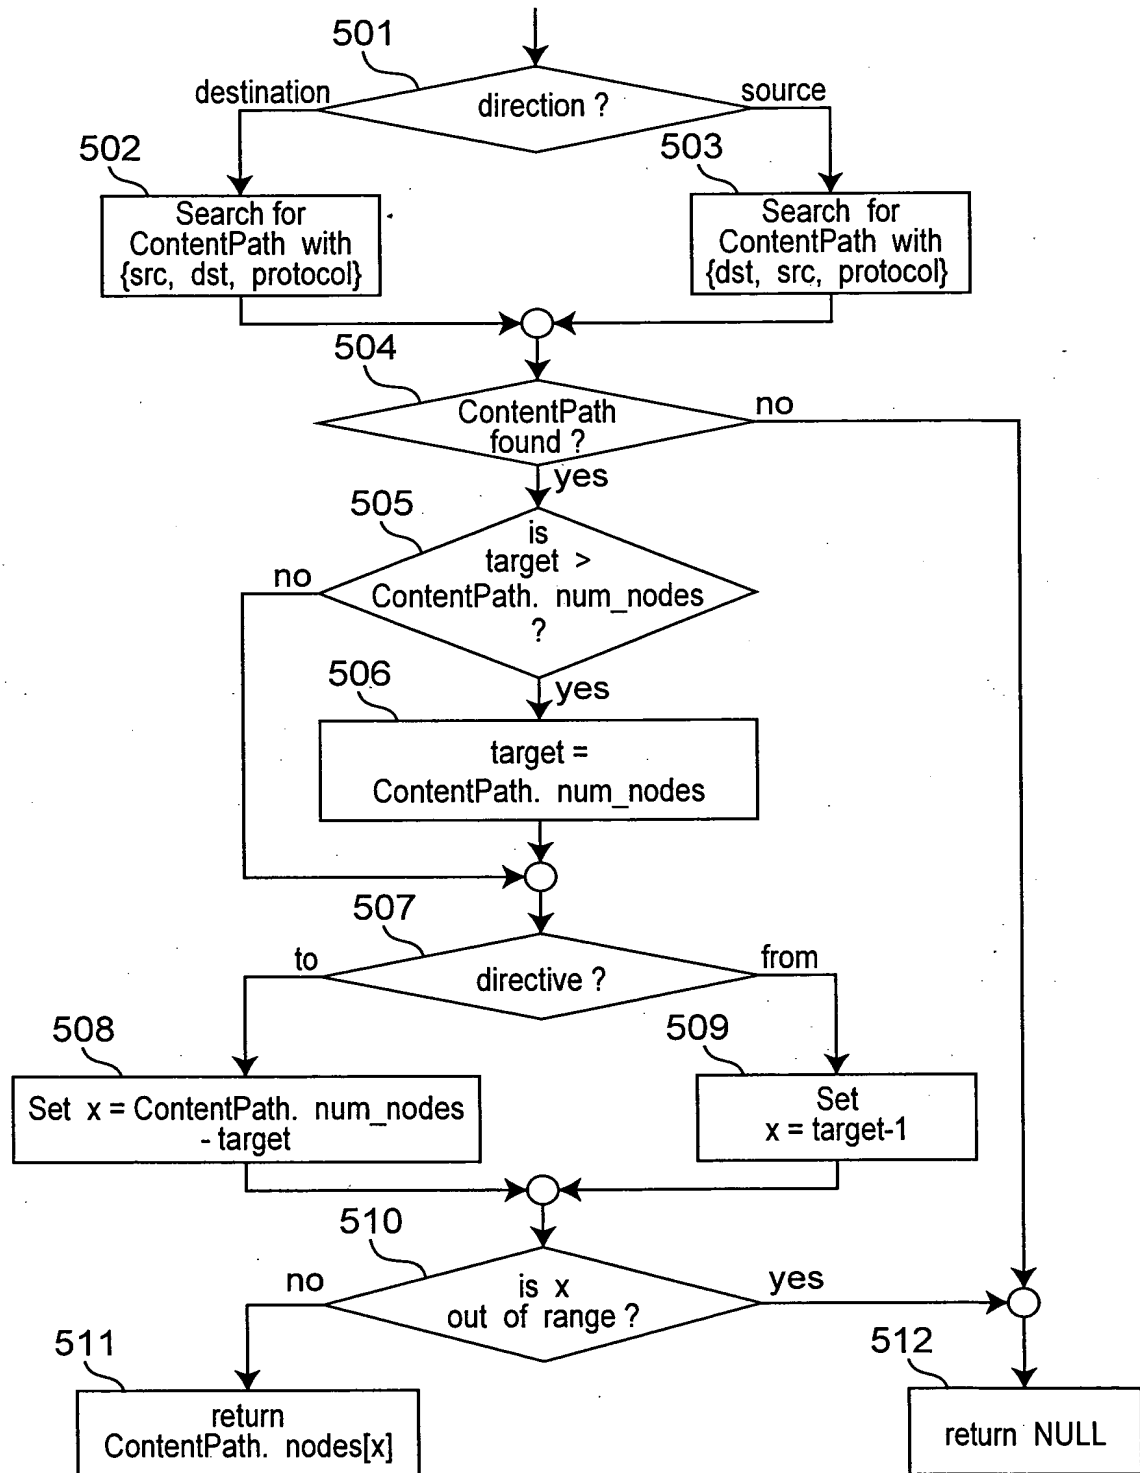


Fig.6



7/7

Fig. 7

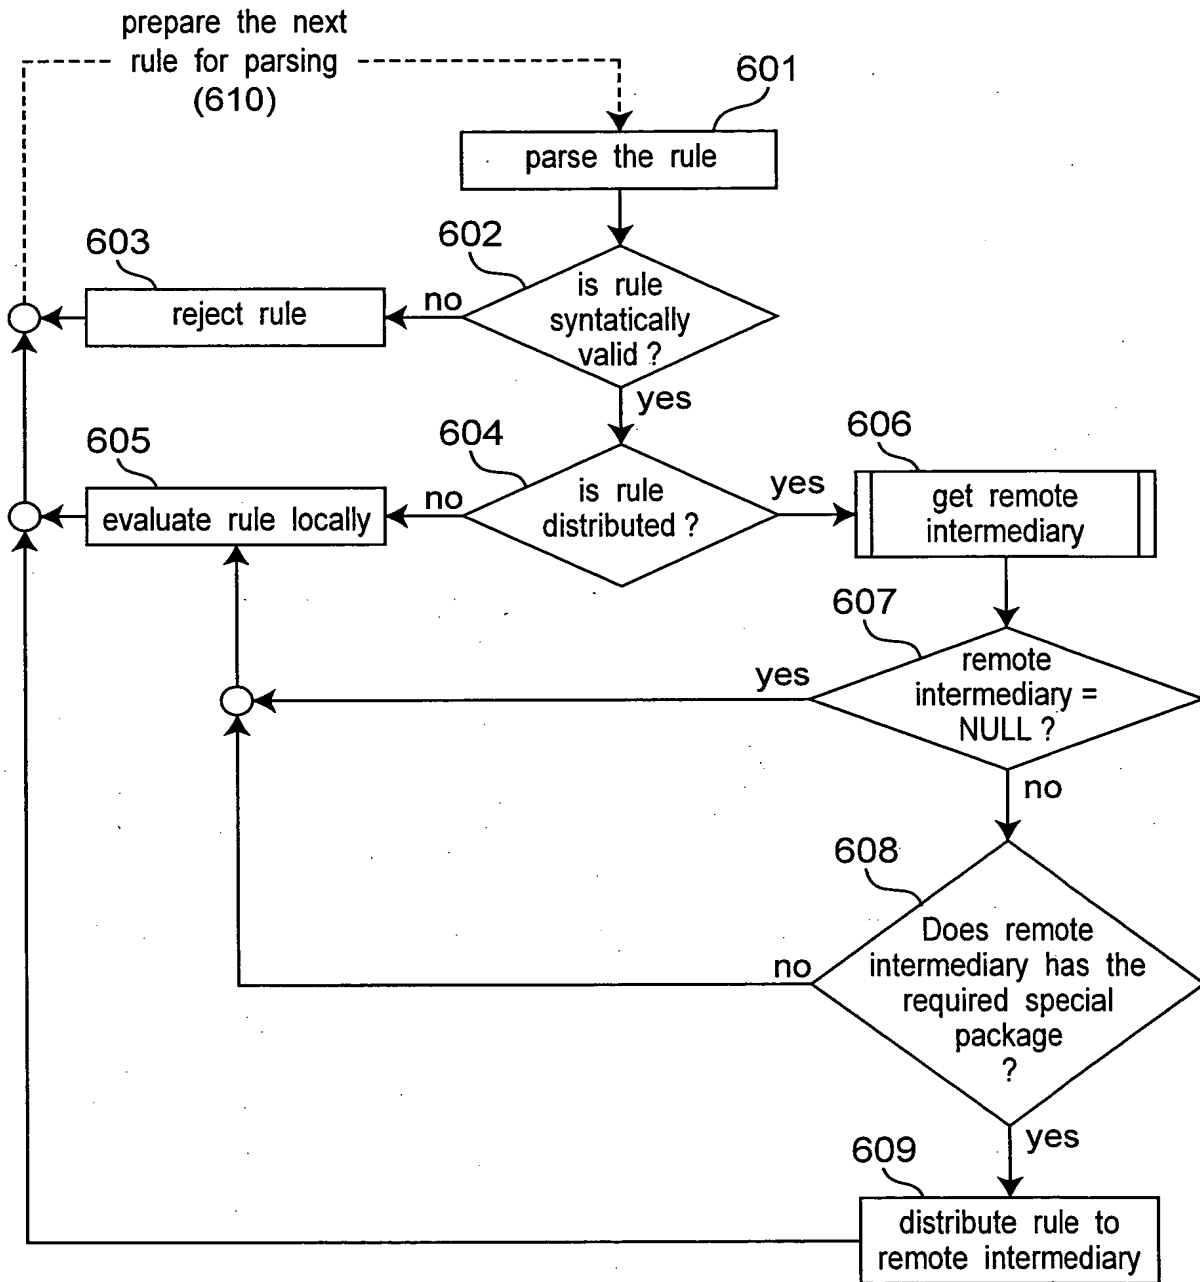